INVESTIEGATION OF TEMPERATURE IMPACT ON COMPRESSIVE STRENGTH OF CONCRETE

BY

Md. Mamunur Rashid
Md. Sohanur Rahman
Prejon Biswas
Ramesh Debnath
Sagor Kumar Ghosh

A thesis submitted to the Department of Civil Engineering in partial fulfillment for the degree of

Bachelor of Science in Civil Engineering



Department of Civil Engineering

Sonargaon University

147/I, Green Road, Dhaka-1215, Bangladesh

Section: 24(B+D)

Semester: Spring-2025

INVESTIEGATION FOR TEMPERATURE IMPACT ON COMPRESSIVE STRENGTH OF CONCRETE

BY

Md. Mamunur Rashid	ID: BCE1702011134
Md. Sohanur Rahman	ID: CE2103024115
Prejon Biswas	ID: BCE1902017042
Ramesh Debnath	ID: CE 2103024140
Sagor Kumar Ghosh	ID: CE 2103024111

Supervisor
Kushal Acharja Topu
Lecturer and Coordinator
Department of Civil Engineering
Sonargaon University

A thesis submitted to the Department of Civil Engineering in partial fulfillment for the degree of

Bachelor of Science in Civil Engineering



Department of Civil Engineering
Sonargaon University
147/I, Green Road, Dhaka-1215, Bangladesh

Section: 24 (B+D)
Semester: Spring-2025

BOARD OF EXAMINERS

Temperature Impact on Compressive Strength of Structural Concrete, Submitted by Md. Mamunur Rashid, ID No: BCE170201134, Md. Sohanur Rahman, ID No: CE2103024115, Prejon Biswas, ID No: BCE1902017042, Ramesh Debnath ID No: CE2103024140, Sagor Kumar Ghosh ID No: CE2103024111. Has been accepted as satisfactory in partial fulfillment of the requirement for the degree of Bachelor of Science in Civil Engineering.

…….

1. Supervisor — Chairman

Koshal Acharja Topu
Lecturer and Coordinator
Department of Civil Engineering
Sonargaon University

……..

2. Internal / External Member — Member

……

3. Internal / External Member — Member

DECLARATION

We hereby declare that this thesis represents our own work done after registration for a bachelor's degree in civil engineering at Sonargaon University, and was not previously included in a thesis or dissertation submitted to this or any other degree, diploma or other degree institution. We guarantee that the current work does not infringe any copyright. We also re-initiate the reassurance of the university against any loss or damage resulting from the breach of previous obligations. Temperature impact on compressive strength in Structural Concrete. We expect more hypotheses to continue on this topic with advanced data in the upcoming future by others.

STUDENT NAME	STUDENT ID	SIGNATURE
Md. Mamunur Rashid	BCE1702011134	
Md. Sohanur Rahman	CE2103024115	
Prejon Biswas	BCE1902017042	
Ramesh Debnath	CE2103024140	
Sagor Kumar Ghosh	CE2103024111	

Dedicated

to

"This thesis is dedicated to our honorable parents

and teachers"

ACKNOWLEGEMENTS

Regardless of our efforts, the success of this dissertation is largely dependent on the encouragement and direction of many others. We would like to take this opportunity to thank everyone who contributed to the successful completion of this thesis. first and foremost, we would like to praise and thank Allah, the almighty, for bestowing countless blessings, knowledge, and opportunities on the writer, allowing us to finally complete the thesis, without which we would not have been able to complete this work on time. We would like to express our heartfelt gratitude to our guide, the department of civil engineering at Sonargaon University, for their invaluable assistance.

I would first like to thank my supervisors Kushal Acharja Topu Lecturer and Coordinator Department of Civil Engineering Sonargaon University for their unwavering support and guidance over the course of this research.

I would also like to thank the many other individuals who had a direct hand in helping with my research. Namely, the Civil Engineering Department lab Assistant Md. Robiullah whose help during this research was simply invaluable, whose efforts left me more than one framework with which to work.

Finally, to my colleagues at the University of Sonargaon, their time and effort during my project whether it involved shoveling, sieving, casting, or batching, heating, crushing, a sincere thank you. This work would not have been possible without your help.

ABSTRACT

In this study we are going to discuss about the strength of concrete after heating. Sometime building catches fire. As a result it loses strength. So our aim is to determine the strength of concrete after heat as part of an investigation on the effect of temperature on the crushing strength of concrete, tests have been carried out using 4 in. diameter by 8 in. long specimens made with ordinary Portland cement, Sylhet sand and coarse aggregate, having various mix proportions and water/cement ratios. The crushing strength of concrete at temperatures up to 400°C was independent of the water/cement ratio used but was influenced by the aggregate/cement ratio. Concrete specimens loaded to produce normal design compressive stress during the period of heating showed less reduction in strength than specimens without imposed load. There was a further loss in the compressive strength of the specimens when cooled after heating.

TABLE OF CONTENT

ABSTRACT ---------- vi
TABLE OF CONTENT ---------- vii
LIST OF TABLE ---------- ix
Introduction ---------- 1
1.1 Importance of the Study ---------- 1
1.2 Objective of the Study ---------- 1
1.3 Thesis Layout ---------- 2
Literature Review ---------- 3
2.1 Introduction ---------- 3
2.2 Material and Method ---------- 3
2.2.1 Cement ---------- 3
2.2.2 Coarse Aggregate ---------- 4
2.2.3 Fine Aggregate ---------- 4
2.3.1 Function of Aggregate in Concrete ---------- 4
2.3.2 Function of Water in Concrete ---------- 4
2.3.3 Properties of Concrete ---------- 5
2.3.4 Strength of Concrete ---------- 5
2.3.5 Elastic Properties of Concrete ---------- 5
2.3.6 Durability of Concrete ---------- 6
2.3.7 Impermeability of Concrete ---------- 6
2.3.8 Deformation of Concrete ---------- 6
2.3.9 Curing Time ---------- 6
2.3.10 Method ---------- 7
3.1 Materials ---------- 8
3.1.1 Cement ---------- 8
3.1.2 Fine aggregate ---------- 8
3.1.3 Coarse aggregate ---------- 9
3.2 Particle Size Distribution ---------- 9
3.2.1 Sieve Analysis ---------- 9
3.2.1.1 Apparatus ---------- 9
3.2.1.2 Test Procedure ---------- 11
3.3 Mix proportion of concrete ---------- 11
3.3.1 Mix Proportion for Concrete cylinder ---------- 11
3.3.2 Mixing of Concrete ---------- 11
3.4 Preparation of mold and de molding ---------- 12
3.4.1 Process of molding ---------- 12
3.4.2 Process of Demolding ---------- 12
3.4.3 Curing ---------- 12
3.5 Compressive strength test ---------- 13
3.5.1 Apparatus ---------- 13
3.5.2 Procedure ---------- 13
4.1 introduction ---------- 15
4.1.1 Sieve analysis of Aggregates ---------- 15
4.2 Strength test 16
4.2.1 Compressive strength test results for varying mixes ---------- 16
4.2.2 Resultant of compressive strength test for mixing proportion 1:1.5:3 ---------- 17
5.1 Conclusions ---------- 20

TABLE OF CONTENT

5.2 Limitation and Recommendations for Future Work ---------- 20
Reference ---------- 21
Concrete mix design ---------- 22

LIST OF FIGURES

Figure 3.1 Cement 8
Figure 3.2 Sand 9
Figure 3.3 Coarse Aggregate 9
Figure 3.4 Apparatus 10
Figure 3.6 Curing of concrete specimens ---------- 12
Figure 3.7 Compressive Strength Test ---------- 14
Figure: 4.1 Compressive strength comparison chart ---------- 19

LIST OF TABLES

Table 2.1 The Main Oxide Compositions and abbreviations in addition to the Average of each in commercially available Port land cement (wt%)- 3

Table 3.1 Estimation of materials for concrete cylinder ---------- 11

Table 3.3 Details of property, test method a greatest, Number and size of Specimens ---------- 13

Table 4.1 Result of Sieve Analysis of Sylhet Sand ---------- 15

Table 4.2 Result of Sieve Analysis of Course Aggregate ---------- 16

Table 4.3 Compressive strength test results for 14 days ---------- 17

Table 4.4 Compressive strength test results for 28 days ---------- 18

CHAPTER 1

INTRODUCTION

1.1 Importance of the Study

The properties of concrete will be deteriorated when it was subjected to high temperature. This is due to the changes of physical properties and chemical composition of concrete. Concrete will undergo different type of damages depending on level of temperature. The effects of concrete component to high temperature were reduction in compressive strength, micro-cracking within the concrete microstructure, color changes consistent with strength reduction, increase in pore structure, and various degree of spelling. There was certain reduction in strength of concrete when it is exposed to high temperature. Based on Ma Qet al. Residual compressive strength of concrete after being exposed to high temperature occurs in three stages which at room temperature-300°C the compressive strength keeps constant. Then at 300-800°C, compressive strength of concrete drop drastically and at more than 800°C temperature, concrete lost its compressive strength.

Concrete specimens loaded to produce normal design compressive stress during the period of heating showed less reduction in strength than specimens without imposed load. There was a further loss in the compressive strength of the specimens when cooled after heating to a given temperature.

In Bangladesh, Dhaka is a most populated city and sometimes building catches fire. Building are damages due to excess heat. In this study we are going to have a discussion how much building are damaged and compare results.

1.2 Objective of the Study

The objectives of thesis are:

- To observe the compressive strength of heated & normal concrete cylinder
- To compare compressive strength results for different temperature.
- To evaluate prospect of using heated aggregate.

1.3 Thesis Layout

This thesis consists of five chapter organized as follows:

Chapter 1: Introduction

Introduction is an introductory chapter that gives the reader the background to the topic, the objective and scope of the thesis.

Chapter 2 Literature Review

- This paper reviews the long-term properties of heated aggregate concrete structure, including long-term strength, shrinkage, creep, impermeability. Most studies have shown that the long term properties of heated concrete are inferior to those of natural aggregate concrete (NAC).

- Temperature impact on concrete properties is affected by many factors such as mixing ratio of aggregates, duration of heating, water-cement ratio, mineral admixtures and mix proportions.

- This paper will be helpful for a comprehensive understanding of and further research on heated concrete, and provides an important basis and references for the engineering applications of temperature impact on concrete.

Chapter 3: Research Method

This is the experimental methodology of this thesis is shown. This chapter will present the basic properties of heated aggregate, concrete mix proportions and test methods.

Chapter 4: Result and discussion

This Chapter presents the general results and discussion of the study on heated Aggregate.

CHAPTER 2
LITERATURE REVIEW

2.1 Introduction

The compressive strength of the concrete cylinder is one of the most common performance measures performed by engineers in the structure design. Here the compressive strength of concrete cylinder is determined by applying continuous load over the cylinder unit failure occurs. The test is conducted on a compression testing machine. Concrete is a structure material, a mix of cement, fin aggregate, coarse aggregate, water and additives. if necessary, which is the final form of cement which is initially hydrated and in a plastic like concentration- after .

The curing method used for precast concrete curing method. Steam curing is usually employed in precast concrete because it accelerates the rate of strength development. However, this curing method alters the properties of the produced concrete. It was found that steam curing reduced the creep of concrete by up to 50 % compared to that of normal moist-cured concrete. Although plenty of information is available on the effect of curing on concrete properties. There is a need to gain more information on the effect of curing on the strength anddurability of concrete produced with high percentages of aggregates.

2.2 Material and Method

Materials and method used in this study are explained in this section.

2.2.1 : Cement

Portland cement is obtained by heating limestone and clay or other silicate mixtures at high temperatures (>1500°C) in a rotating kiln. The resulting clinker, when cooled, is mixed with gypsum (calcium sulfate) and ground to a highly uniform fine powder. Anhydrous Portland cement consists mainly of lime (CaO), silica (SiO_2), and alumina (Al_2O_3), in addition to small amounts of magnesia (MgO), ferric oxide ($Fe2O_3$), sulfur trioxide (SO_3), and other oxides that are added as impurities in the raw materials during its manufacture. When these oxides are blended together, they form the four basic components of Portland cement, namely: tricalcium silicate, dicalcium silicate, tricalcium aluminate, and tetra calcium alumina-ferrite. Table 2.1 describes the main oxide compositions and abbreviations, in addition to listing the average of each in commercially available ordinary Portland cement (OPC) (wt.%).

Table 2.1 : The Main Oxide Compositions and abbreviations in addition to the average of each in commercially available Portland cement(wt%)

Oxide constituent	Oxide composition and abbreviation	Average weight (%)
Tricalcium silicate	$3CaO{\cdot}SiO_2$ (C_3S)	40–60
Dicalcium silicate	$2CaO{\cdot}SiO_2$ (C_2S)	13–50
Tricalcium aluminate	$3CaO{\cdot}Al_2O_3$ (C_3A)	4–11
Tetracalcium aluminoferrite	$4CaO{\cdot}Al_2O_3{\cdot}Fe_2O_3$ (C_4AF)	7–13
Others		7–10

2.2.2 Coarse Aggregate

The coarse aggregate was prepared according to the specified mix type. The mix types included fully saturated coarse aggregate, partially saturated coarse aggregate, and oven dry coarse aggregate. In each case, a water content sample was taken following the saturation procedure in order to gauge the actual water content of each mixture.

2.2.3: Fine Aggregate

Locally procured natural sand was used in the experimental program. Fine aggregate resulting from the natural disintegration of rocks and which has been deposited by streams or glacial agencies.

2.3.1 : Function of Aggregate in Concrete

aggregates perform the following functions:

1. It assists in producing workability and uniformly in mixture.
2. It assists the cement paste to hard the coarse aggregate particles.
3. It helps to prevent possible segregation of paste and coarse aggregate particularly during the transport operation of concrete for a long distance.
4. Fine aggregate reduces the shrinkage of binding material.
5. It prevents the development of a crack in the concrete.

2.3.2: Function of water in Concrete

Water Cement Ratio signifies the ratio among the weight of water to the weight of cement applied in concrete mix.

Generally, water cement ra

tio remains under 0.4 to 0.6 with adherence to IS Code 10262 (2009),for nominal mix (M10, M15 …. M25)

The strength of concrete is directly impacted by the water cement ratio. It enhances the strength if employed in perfect ratio and if the ratio is improper, the strength will be reduced.

The importance of Water in Concrete :

Concrete refers to a macro content. It comprises of micro constituents like cement, sand, fine aggregate &Coarse aggregate. With the purpose of obtaining high strength concrete to resist the desired compressive strength, it is required to set exact ratio of admixture to unite these materials.

The function of water is important here to accelerate this chemical process by adding 23%-25% of the cement volume. It produces 15% of water cement paste also called gel to fill the voids in the concrete.

Impact of too much water in concrete: If additional water is added more than the permissible limit of 23%, the strength of concrete will be significantly affected.

If the task of adding water is continued to improve the workability then the concrete contains lots of fluid materials where the aggregates will settle down. As soon as the water is evaporated it puts down lots of voids in concrete which influences the concrete strength.

But if the guidelines are followed to retain the strength of the concrete then it will change the concrete workability and makes it difficult to manage and place them.

Workability signifies the capacity of concrete to manage, convey and place devoid of any segregation. The concrete becomes perfectly workable if it can be easily dealt with, placed and transported devoid of any segregation at the time of being placed in construction site.

For this purpose, plasticizers & super plasticizers are utilized to enhance the workability by keeping the W/C ratio unchanged.

2.3.3: Properties of Concrete

Concrete is a composite material obtained by mixing Cement, sand, aggregates, and water in suitable proportions. Concrete has become a universal building material which is extensively used in civil engineering construction.

It is necessary to know about important properties of concrete for every civil engineer to design a structure. Properties of concrete are controlled and influenced by the various factors, out of them mix proportions plays an important role in concrete strength and these proportions control the properties of strength.

2.3.4: Strength of Concrete

Type of Concrete Strength:

2.3.4.1: Compressive Strength:

Compressive strength of specimen Treated in a standard manner which includes full compaction and wet curing for a specified period give results representing the potential quality of the concrete. There are three types of loading in compressive test:

2.3.3.1.1 uniaxial loading

2.3.3.1.2 biaxial loading

2.3.3.1.3 triaxial loading

There are three types of failure

a. tension failure

b. shear failure

c. companied failure.

2.3.5 : Elastic Properties of Concrete

Concrete isn't flawlessly versatile for any scope of stacking, Flexible properties of cement change with the extravagance of cement change with the power of pressure. (powers, 1968)

2.3.6 : Durability of Concrete

Concrete durability depends upon the degree of exposure, the concrete grade (or strength) and the cement content. A high density, alkali-resistant concrete will better resist the effects of moisture penetration. Since concrete is a porous material reinforcement bars within the concrete will be subject to possible corrosion if safeguards are not taken. Adequate concrete „cover" to the reinforcement should be included in the specifications in order to reduce moisture or salts penetrating to the rebar. Should the rebar corrode it will expand and the considerable forces involved cause the concrete to crack.

2.3.7 : Impermeability of Concrete

Impermeability is the ability of a material to resist the pressure water or the infiltration of other liquids. It plays an important role in the durability of concrete moreover, it also directly affects the frost-resistance and anti-corrosion of concrete.

2.3.8 : Deformation of Concrete

As with all other materials, concrete is deformable, and is considered to exhibit linear elastic behavior under short duration moderate loads. This means that its deformation is proportional to the applied loads. The instantaneous elastic modulus of concrete is between 30,000 and 35,000 MPa. Deformation under long duration loads: creep

When loads exceed a certain level, concrete behaves as a plastic body. After removal of the load there is still a residual permanent deformation, known as creep.

The deformation due to the process of creep, which continues for months or even years, is of the order of three times the instantaneous deformation.

2.3.9 Curing Time

Curing plays a vital role in concrete strength development and durability. After adding water to the concrete mix (Cement, Sand & Aggregate), the exothermic reaction (hydration) takes place, which helps the concrete to harden. Hardening of concrete is not instant and continues for a longer period, which requires more amount of water for processing hydration. So, the concrete kept moist until the hydration reaction in concrete completes. This process called the curing of concrete.

Minimum curing time for cement concrete:

The early strength of concrete is most important, and it is responsible for the ultimate strength of concrete. We should do proper curing by considering the environmental conditions, type of structural members, atmospheric temperature. Maintaining the proper temperature also plays a vital role in concrete

as mentioned, it should not be colder than 5^0C. Concrete is kept moist for at least 28 days. Nowadays, due to lack of time, the curing can be achieved by following modern techniques in 14-20 Days. Nevertheless, it is always advisable to keep concrete moist for at least 14 days.

As per IS 456 – 2000, concrete should not be cured less than 7 days for ordinary Portland Cement, & it must be at least 10 days for concrete with mineral admixtures or blended cement. In case of hot weather and arid temperature conditions, the curing should not be less than 10 Days for OPC and 14 days for concrete with blended cement & mineral admixtures.

2.3.10 Method

A total number of 4 cubic concrete samples were produced at two different sizes, 8x8 cm using stream aggregate and basaltic crushed aggregate. The concrete produced were then tested for fresh and set state. Slump test was conducted on the concrete samples in order to test the place ability of concrete before casting the concrete. Slump test was conducted in accordance with the TS EN standard in order to obtain information on the place ability concrete and flow diameter range of 420-480 mm was taken for the F3 class available.

CHAPTER 3
METHODOLOGY

3.1 Materials

In this study, five materials are used top reduce desired concrete mixture. Them arterials are cement, fine aggregate, natural coarse aggregate and potable water.

3.1.1 Cement

Cement is used as a binding materials which is used to set, harden and to bind the materials withits adhere properties. Fresh cement is one of the most used cement in Bangladesh. We used Fresh cement for research purpose. Fresh cement is ordinary Portland cement shown in figure
3.1. Fresh Cement Ordinary Portland Cement surpasses the requirements of BDS EN 197-1:2000CEM-I 52.5 N Grade. It is produced from high-quality clinker ground with high purity gypsum. Fresh Cement Portland Cement provides high strength and durability to structures because of its optimum particle size distribution, superior crystalline structure, and balanced phase composition. It was used for its high early strength and very fast setting time. Cement was uniform in color, there were nohard lumps and cement were cool when hand was plunged into the bag before using



Figure-3.1Cement (Lab)

3.1.2 Fine Aggregate

It is the aggregate most of which passes through No.4 (4.75m) sieve and contain only that much coarser material as is permitted by the specifications. Same type of sand were used as the fine aggregate for both NAC and RAC in this study as shown in the figure. The sand were oven dried before being use to obtain SSD.



Figure-3.2 Sylhet Sand (Lab)

3.1.3 Coarse aggregate

Stone chips were used as coarse aggregate for research purpose shown in figure3.3.

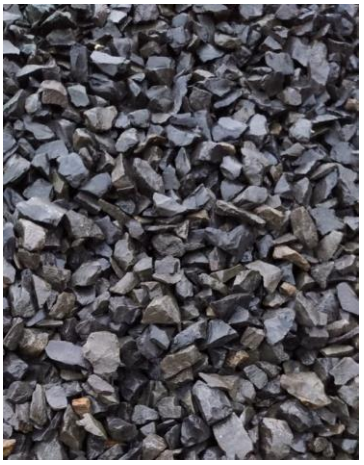


Figure-3.3 Coarse aggregate (Lab)

3.2 Particle Size Distribution

3.2.1 Sieve Analysis

For particle size distribution for both coarse and fine aggregate sieve analysis method were used according to ASTM C136.

3.2.1.1 Apparatus

For sieve analysis, following apparatuses were used-

(a) Balance;

(b) Sieves;

(c) Oven and

(d) Containers.







Figure: 3.4 Apparatus (Lab)

3.2.1.2 Test Procedure

The samples were dried to a constant mass at a temperature of around 110°C and after drying samples were weighted. A set of IS sieves with suitable openings were used to sieve the samples. Quantity of materials was limited so that all the materials could reach the sieve opening a number of times during sieve analysis. Sieving process was continued for a sufficient period until the particles were not passing through the sieve. On completion of sieving, the materials retained on each sieve were weighted on balance. Cumulative weight retained into each sieve and percentage of cumulative weight retained was calculated.

3.3 Mix Proportions of Concrete

For this research mixture proportion of different groups of concrete were determined in accordance with following conditions-

a) water/cement ratio 0.50
b) Maximum grain size (20mm)
c) Same type and quantity of fine aggregate
d) Variable type and quantity of coarse aggregate.
e) Mixing ratio 1:1.5:3

3.3.1 Mix Proportions for Concrete cylinder

To perform compressive and tensile strength test, 100 mm x 200 mm cylinder concrete were made. The mix proportions were 1:1.5:3 for cement: sand: coarse aggregate. Amount of concrete for a cylinder of each batch are shown in the following table:

Table 3.1 Estimation of materials for concrete cylinder

Batch No	Cement (gm)	Sand (gm)	Coarse Aggregate (gm)	Water ratio %
1	21818	37227	73636	0.50

3.3.2 Mixing of Concrete

A smooth, water tight surface was selected as platform and it were washed before mixing of concrete. Sand were measured for each mixing batches and was spread evenly to the platform. There required quantity of cement was dumped on the sand and spread evenly. Sand and cement we remixed properly until the mixture became uniform in color. Sand and cement mixture was spread evenly and required amount of coarse aggregate was spread on the mixture. After spreading coarse aggregate, whole mass were mixed with shovel properly until the mixture was uniform. Mixing ratio1:1.

3.4 Preparation of mold and demolding

3.4.1 Process of molding

1. For compressive and tensile strength test, steel cylindrical mold were used. Height and diameter of the mold were 200mm and100mm respectively.
2. Molds were cleaned and grease was applied on the inner surface of the mold.
3. Concrete were filled in the mold in 3 layers.
4. Each layer was ridded 25 times in an even pattern using a tamping rod.
5. After tamping, the top surfaces are leveled.
6. The molded specimens were kept at normal temperature to dry.

3.4.2 Process of Demolding

After 24 hours of casting, the concrete specimens were removed from the mold and allowed for curing.

3.4.3 Curing

After de molding, the specimens were placed under water up to 3days, 7days and 28days. The specimens were fully immersed under water. Figure3.6 shows curing of cylinder concrete specimens.



Figure3.6: Curing of concrete specimens (Lab)

Total number of specimens for each test and their age and size are given below:

Table3.3: Details of property, test method a geat test, Number and size of specimens

Mixing Ratio	Test Method	Age at Test (days)	Size of Specimen	No. of Set
1:1.5:3	ASTM C39	14	100 mm dia × 200 mm height Cylinders	15
		28	100 mm dia × 200 mm height Cylinders	15

3.5 Compressive Strength Test

Compressive strength test is a method to measure the strength of concrete. In this study, the compressive strength of specimens was measured according to ASTM C39. ASTM C39 determines the compressive strength of cylindrical concrete specimens such as molded concrete cylinders and drilled cores. However, this is limited to concrete having unit weight more than800kg/ m3.

In this method, axial compressive load is applied to the cylinder specimen at a standard load rate the machine can provide. Load is applied until the failure occurs. The strength test can be used for quality control i.e. acceptance of concrete to use in construction.

3.5.1 Apparatus

1. Compression testing machine and
2. Balance.

3.5.2 Procedure

1. The weight of specimen was measured and then it was placed on the lower bearing block So the axis of the specimen is aligned with the center of thrust of the spherically seated Bearing block.

2. Age, weight, type and peak load was provided in the screen of testing machine and a Compressive load of.25MPa/s was applied continuously and without shock until failure.

3. Maximum load carried by the specimen during the test was recorded and the type of

fracture pattern was noted.



Figure3.7: Compressive Strength Test (lab)

CHAPTER 4

RESULT AND DISCUSSION

4.1 Introduction

Compressive strength of concrete is the engineering properties of concrete which designs are concerned of. It gives an overall view of quality of concrete as it is directly related to the structure of hardened concrete. Concrete has been made with different percentage of coarse aggregate from different sources for target strength. OPC & local sand were used as fine aggregate to make the concrete. Compressive strength has been tested for 14 & 28 days.

4.1.1 Sieve Analysis of Sand:

Fineness Modulus is defined as an index to the particle size not to the gradation. Fineness Modulus is calculated from the sieve analysis. It is defined mathematically as the sum of the cumulative percentages retained on the standard sieves divided by 100. The standard size sieves are 3/4 (19.0 mm), 3/8 (9.5 mm), No. 4 (4.75 mm), No. 8 (2.36 mm), No. 16 (1.18 mm), No. 30 (600 µm), No. 50 (300µm), and No. 100 (150 µm). Always report the fineness modulus to the nearest 0.01. In fineness modulus, the finer the material the more the water demand is. It is used for the purpose of estimating the quantity of coarse aggregate to be used in the concrete mix design.

Table 4.1: Result of Sieve Analysis of Sylhet Sand

Sieve Analysis For Fine Aggregate						
Sieve Number	**Sieve Opening (mm)**	**Material Retained (gm)**	**Material Retained (%)**	**Cumulative Percentage Retained (%)**	**F.M**	**Percent Finer (%)**
4	**4.75**	**26**	**2.60**	**2.60**	**2.61**	**97.40**
8	**2.36**	**57**	**5.70**	**8.30**		**91.70**
16	**1.19**	**130**	**13.00**	**21.30**		**78.70**
30	**0.59**	**226**	**22.60**	**43.90**		**56.10**
50	**0.3**	**430**	**43.00**	**86.90**		**13.10**
100	**0.15**	**118**	**11.80**	**98.70**		**1.30**
Pan	**-**	**13**	**1.30**	**-**		**0.00**
Sum =	**-**	**1000**	**100%**	**261.70**		**-**

Table 4.2: Result of Sieve Analysis of Coarse Aggregate

Sieve Analysis For Coarse Aggregate						
Sieve Number	**Sieve Opening (mm)**	**Material Retained (gm)**	**Material Retained (%)**	**Cumulative Percentage Retained (%)**	**F.M**	**Percent Finer (%)**
3/4''	**4.75**	**570**	**33.50**	**33.50**	**7.30**	**66.50**
3/8''	**2.36**	**1082**	**63.60**	**97.10**		**2.90**
4	**1.19**	**48**	**2.80**	**100.00**		**0**
8	**2.36**	**0**	**0**	**100.00**		**0**
16	**1.19**	**0**	**0**	**100.00**		**0**
30	**0.59**	**0**	**0**	**100.00**		**0**
50	**0.3**	**0**	**0**	**100.00**		**0**
100	**0.15**	**0**	**0**	**100.00**		**0**
Pan	**-**	**0**	**0**	**-**		**0**
Summation	**-**	**1700**	**-**	**730.60**		

4.2 Strength Test

4.2.1 Compressive Strength Test Results for Varying Mixes

Compressive strength of concrete by applying heated aggregates and natural aggregates were compared using normal curing. The compressive strength of cylinder was determined with the help of compression testing machine (CTM). Table below gives the result of compressive strength of concrete of both heated and fresh concrete at the age of 14 and 28 days.

4.2.2 Resultant of Compressive Strength Test for mixing proportion 1:1.5:3

Table: 4.3 Compressive Strength Test Results

Curing Duration	Temperature	Trial	Weight (gm)	Load (kn)	Mean load (kn)	Strength (psi)
14 days	At normal temperature	1	3789	309	297	5428
		2	3675	290		
		3	3663	292		
	100°C	1	3630	240	236	4244
		2	3720	232		
		3	3655	237		
	200°C	1	3580	208	210	3758
		2	3636	204		
		3	3605	220		
	300°C	1	3585	196	194	3517
		2	3525	199		
		3	3510	187		
	400°C	1	3421	151	136	2441
		2	3430	122		
		3	3406	136		

Table: 4.4 Compressive Strength Test Results

Curing Duration	Temperature	Trial	Weight (gm)	Load (kn)	Mean load (kn)	Strength (psi)
28 days	At normal temperature	1	3796	365	354	6620
		2	3655	350		
		3	3648	348		
	100ºC	1	3771	280	286	5118
		2	4011	287		
		3	3967	290		
	200ºC	1	3633	237	247	4616
		2	3610	240		
		3	3620	265		
	300ºC	1	3541	223	227	4165
		2	3547	240		
		3	3650	218		
	400ºC	1	3426	185	164	3024
		2	3444	147		
		3	3568	160		

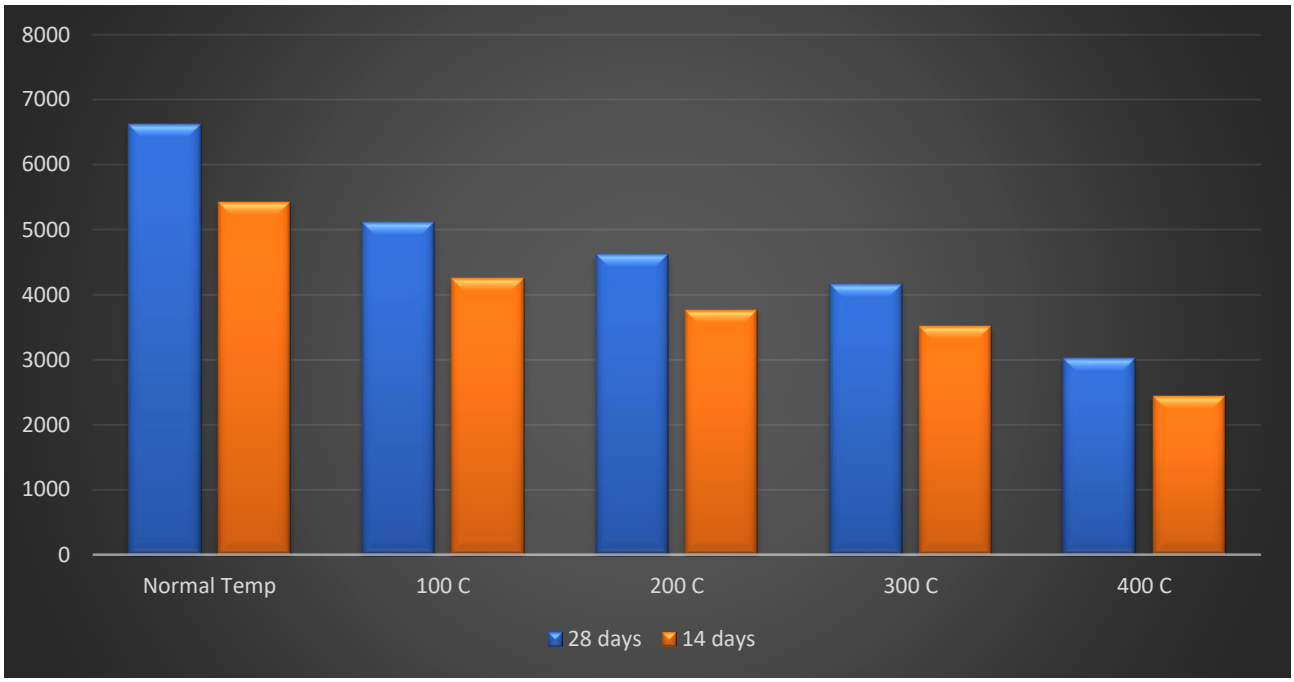


Figure: 4.1 Compressive strength Chart

From the figure we find that compressive strength after 14 and 28 days using ratio of 1:1.5:3. Here we put the average value of cylinder compressive strength. There is given the value of normal temperature and other four set is after impacting 100ºC, 200ºC, 300ºC & 400ºC temperature.

From this curve we can see that after at the age of 14 days and 28 days comparing normal to 400ºC temperature. Compressive strength of cylinder is maximum at normal temperature on the other hand after increasing temperature gradually up to 400ºC the strength of concrete fall down.

CHAPTER 5
Conclusion and Future Work

5.1 Conclusions

The study is a part of comprehensive program where in experimental investigations have been carried out to assess the effect of temperature on aggregate by different percentages in concrete on compressive strength of heated concrete for the period of 14 days and 28 days.

Test results indicate that heated aggregate is not suitable for residential, industrial and commercial etc. buildings. The resultant of this thesis paper we can say that, the temperature impact on concrete reduces the compressive strength of concrete upto 65% at range of 100ºC to 400ºC.

So, we can also say that, it loses strength when a building catches fire. For high temperature if this process continues for a long period of time the building loses its strength and becomes inhabitable.

5.2 Limitation and Recommendations for Future Work

In this research we have performed STP to 400º centigrade temperature impact on concrete. We could perform up to 1000° centigrade temperature. But insufficient of apparatus we have performed up to 400° centigrade temperature.

In future we can performed this research for high temperature at long period of time. We can also compare the physical changes and chemical changes for high temperature on concrete.

Reference

[1] H. L. Malhotra, The effect of temperature on the compressive strength of concrete, 2015.

[2] F. M. Nazr, Effects of heating durations on normal concrete, IOP Publishing, 2017..

[3] Hosam M. Saleh, "New Materials in Civil Engineering," (2020).

[4] M. Sautya, "Functions Of Fine and Coarse Aggregate in Concrete. p. 1.," (2019, may 29).. [Online].

[5] Krishna. (2018, april 8). Important Properties of Concrete , 1

[6] Dr C.R. Bayliss Eng FIET. (2012). Transmission and Distribution Electrical Engineering.

[7] Engineering, B. M. (2011). Basic Properties of Building Decorative Materials.

[8] ASCO-TP. (2008, january 31). Association pour la connaissance des Travaux Publics. The deformation of concrete

[9] Krishna. (2020, june 28). Curing of Concrete | Curing time & Duration | Curing methods.

[10] Significance of Tests and Properties of Concrete and Concrete-Making Materials (ASTM, 2006).

[11] INDIAN STANDERD – 2009

Concrete Mix Design

Required Data M20 Grade Concrete [11]

- Grade of concrete = M20
- Characteristic compressive strength of concrete at 28days = 20N/mm^2
- Nominal maximum size of aggregate = 20mm
- Specific Gravity of cement = 3.15
- Specific gravity of fine aggregate = 2.5
- Specific gravity of Coarse aggregate = 2.8

Step 1: Calculation of Target Strength

Target mean strength of concrete is derived from the below formula

$$\mathbf{f_t = f_{ck} + 1.65\ s}$$

Where S = standard deviation which is taken as per below table= 4

Grade of concrete	**Standard deviation (N/mm^2)**
M10	3.5
M15	3.5
M20	4.0
M25	4.0
M30	5.0
M35	5.0
M40	5.0
M45	5.0
M50	5.0

Characteristic compressive strength after 28 days f_{ck} = 20N/mm^2

f_t = 20+ 1.65 x 4

Therefore, target mean strength **f_t = 26.6N/mm^2**

Step 2: Selection of Water-Cement Ratio

From Table 5 of IS 456, (page no 20)[11]

Maximum water-cement ratio for Mild exposure condition = 0.55

Based on experience, adopt water-cement ratio as 0.5.

0.5<0.55, hence OK.

Let, **W/C ratio = 0.55**

Step 3: Air Content Calculation

Nominal maximum size of aggregate taken is = 20mm

Nominal maximum size of aggregate	**Air content (% of the volume of concrete)**
10mm	5%
20mm	2%
40mm	1%

So, from the table entrapped air content in % of the volume of concrete = 2%

Step 4: Water Content Calculation

For nominal maximum size of aggregate of 20mm, the required water content is selected form the table-

Nominal maximum size of aggregate	Maximum water content
10mm	208
20mm	186
40mm	165

The aggregate nominal maximum size is 20mm and they belong to zone 2 (From Table 3 of IS 10262- 2009). So, Adjustment for compacting factor is to be applied.

Therefore, water content = 186 + (186 x 3/100) = **191.6 lit / m^3 of concrete.**

Step 5: Cement Content Calculation

From step 2, Water cement ratio = W/C = 0.55
From step 4, Water content W = 191.6 liters = 191.6kg
191.6 / C = 0.55
Finally, C = 348.36Kg / m^3 of concrete

Step 6: Aggregate Ratio for Concrete

Table 3 Volume of Coarse Aggregate per Unit Volume of Total Aggregate for Different Zones of Fine Aggregate
(*Clauses* 4.4, A-7 *and* B-7)

Sl No.	Nominal Maximum Size of Aggregate	Volume of Coarse Aggregate[1)] per Unit Volume of Total Aggregate for Different Zones of Fine Aggregate			
	mm	Zone IV	Zone III	Zone II	Zone I
(1)	(2)	(3)	(4)	(5)	(6)
i)	10	0.50	0.48	0.46	0.44
ii)	20	0.66	0.64	0.62	0.60
iii)	40	0.75	0.73	0.71	0.69

[1)] Volumes are based on aggregates in saturated surface dry condition.

From the table, ratio of volume of coarse aggregate to volume of total aggregate, for 20mm nominal maximum size aggregate and zone-2 fine aggregate is

Therefore, **P = 0.62**

Step 7: Aggregate Content Calculation

Volume of concrete (with entrapped air) = 1 m^3

From step 3, Entrapped air % = 2% = 0.02

Therefore, volume of concrete (without air content) = 1-0.02 = 0.98m^3

Fine aggregate content F.A is determined from below formula,

$$\mathbf{V = [W + C/Gc + (1/ (1-P) X (F.A)/Gf)] x 1/1000}$$

0.98 = [191.6 + 348.36/3.15 + (1/ (1-0.62) X (F.A)/2.5)] x 1/1000

Therefore, amount of fine aggregate **F.A = 643.92 kg**

$$\mathbf{V = [W + C/Gc + (1/ P) X (F.A)/Gf)] x 1/1000}$$

0.98 = [191.6 + 348.36/3.15 + (1/ 0.62) X (F.A)/2.5)] x 1/1000

Therefore, amount of coarse aggregate **C.A = 1050.59 kg**

Step 8: Final Mix Proportions of Ingredients

W/C ratio = 0.50

Cement quantity = 348.36Kg = 345kg

Fine aggregate quantity = 673.52kg = 669.67 kg

Coarse aggregate Quantity = 1050.59 kg

Mix proportion for M25 Concrete = Cement: F.A : C.A = 1 : 1.5 : 3

Appendix



BANGLADESH INDUSTRIAL TECHNICAL ASSISTANCE CENT
TEJGAON INDUSTRIAL AREA, DHAKA-1208
PHONE : 8870680, 8870266, 8870715
DELIVERY CHALLAN

No. 1625 Date

Name

Address

Purchase Order No.

Date

Job No. Gate Pass No.

Part No.	Description
০২।	

আলাপনী- পিএবিএক্স ০২-৫৫০৩০০৫৭, ০২-৫৫০৩০০৪৬

রশিদ নং- 83313

বাংলাদেশ শিল্প কারিগরি সহায়তা কেন্দ্র (বিটাক)

তেজগাঁও শিল্প এলাকা, ঢাকা-১২০৮

তারিখ

এর নিকট হইতে

অত্র কেন্দ্রের নং কাজের বাবদ নগদ/চেক নং তারিখ

মারফত টাকা পয়সা ধন্যবাদের সহিত প্রাপ্তি স্বীকার করিয়া এই রশিদ দেওয়া গেল।

কোষাধ্যক্ষ

পক্ষে-
আয়ন ও ব্যয়নীকর্মকর্তা